


ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:

ITEM NO.: 89472	NAME: Mika Chandelier
MATERIAL TYPE: Glass	FINISH: Antique Brass
SOCKET TYPE: E12	SOCKET QTY: 18
BULB WATTAGE: 40W/10W CFL/9W LED	
VOLTAGE: 110-120 V	ITEM NET WEIGHT: 50LBS

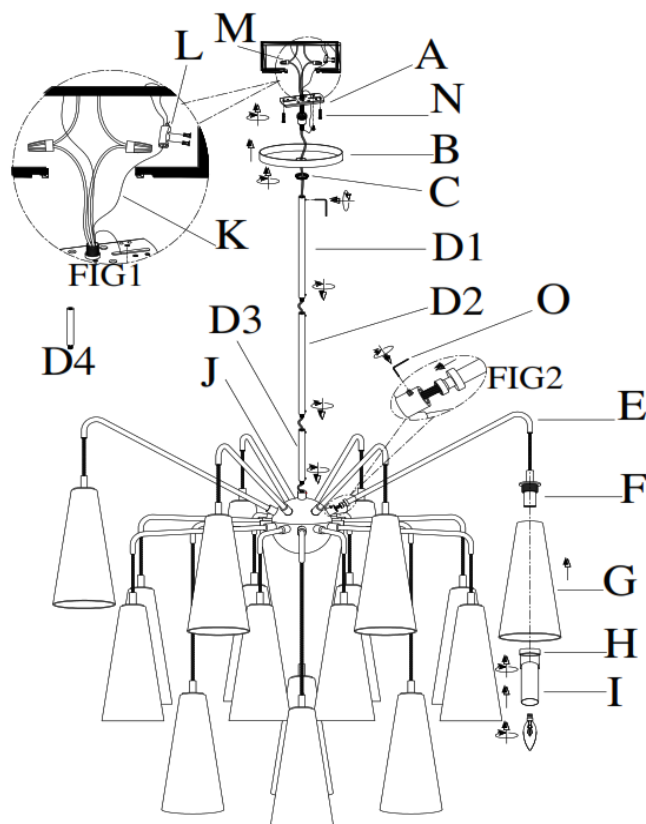

PARTS INCLUDED:

(A) Mounting Plate	Qty: 1	(G) Glass Shade	Qty: 18
(B) Canopy	Qty: 1	(H) Socket Ring	Qty: 18
(C) Collar Loop	Qty: 1	(I) Socket Tool	Qty: 1
(D1,D2,D3,D4) Rod	Qty: 4	(J) Junction Box	Qty: 1
(E) Arm	Qty: 18	(K) Steel Cable	Qty: 1
(F) Socket Assembly	Qty: 18	(L) Lock	Qty: 1

HARDWARE INCLUDED:

(K) Plastic Wire Connector	2 Pc	(O) Allen Wrench	1 Pc
(N) Mounting Screw	2 Pc	Green Ground Screw	1 Pc

TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation of this chandelier.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

TO ASSEMBLE:

1. Remove all packing contents from the carton(s) carefully. Please be sure you have all parts indicated before you begin assembly.
2. Shut off the main electrical supply from the main fuse box/circuit breaker.
3. Remove the mounting plate(a) from the canopy (B) by turning collar loop (C) in a counterclockwise direction.
4. Screw the rod (D3) onto the wire junction box (J) and tighten the hexangular screw in the side desire hole by Allen wrench (O). Repeat the same operation on the rod (D1) and (D2). If the ceiling is high enough, pls assemble the rod (D4) if need.
5. As fig2, attach arm (E) to the wire junction box (J), and tighten the hexangular screw in the side desire hole by Allen wrench (O). Repeat the same operation on the remaining 17pcs arm carefully.
6. Unscrew the socket ring(h) off the socket assembly (F). Attach the glass shade (G) to the socket and secure with socket ring by using tool(i) till tight. Repeat the same operation on the remaining 17pcs socket ring and glass shade.
7. Carefully inspect the pendant's fixture wires. The neutral fixture wire has very fine ridges molded into its plastic covering. The hot fixture wire has a smooth covering. The bare silver wire is the grounded wire.
8. Attach the ground wire from fixture to the ground j-box wire from the outlet. Fasten together with a plastic wire connector (M) and wrap connection with electrical tape. If your outlet box does not have a ground wire, insert the green ground screw into the mounting plate (A) facing down, and wrap the fixture's bare ground wire around the ground screw. It is imperative that the outlet box in your home be properly grounded.
9. Connect the neutral fixture wire to the neutral junction box wire (usually white). Fasten each together with a wire connector (M) and wrap the connection with electrical tape. Be sure no strands are exposed.
10. Connect the hot fixture wire to the hot junction box wire (usually black). Fasten each together with a plastic wire connector (M) and wrap the connection with electrical tape. Be sure no wire strands are exposed. Do not reverse the hot and neutral connections or safety will be compromised.
11. Attach the steel cable (K) to the fixed fixture (an appropriate load bearing structure) on the ceiling with the lock (L) this luminaire must be mounted or supported independently of an outlet box.
12. Gently truck the wire connections neatly into the ceiling junction box.
13. Attach the mounting plate (A) with nipple to the ceiling outlet box using the enclosed mounting screws (N) and tighten screws with a screwdriver.
14. Push collar loop in canopy (B) and thread onto nipple in mounting plate (a) by turning in a clockwise.
15. Screw rod (D1) to the canopy (B) by using hexangular screw and Allen wrench (O) be sure all the hexangular screws are tight enough.
16. Insert 18 type b 40w bulbs (or suitable cfl 10w/led 9w bulbs, not included) in the socket.do not exceed specified wattage.
17. Restore power to the junction box and test fixture.

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIO RS