

ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:

ITEM NO.: DLC07

NAME: Towne Chandelier

MATERIAL TYPE: Steel/Glass

FINISH: Antique Brass/Opal/Clear


SOCKET TYPE: E12

SOCKET QTY: 8

BULB WATTAGE: 60W or/CFL 12W or/LED 10W

VOLTAGE: 110-120 V

ITEM NET WEIGHT: 54LBS

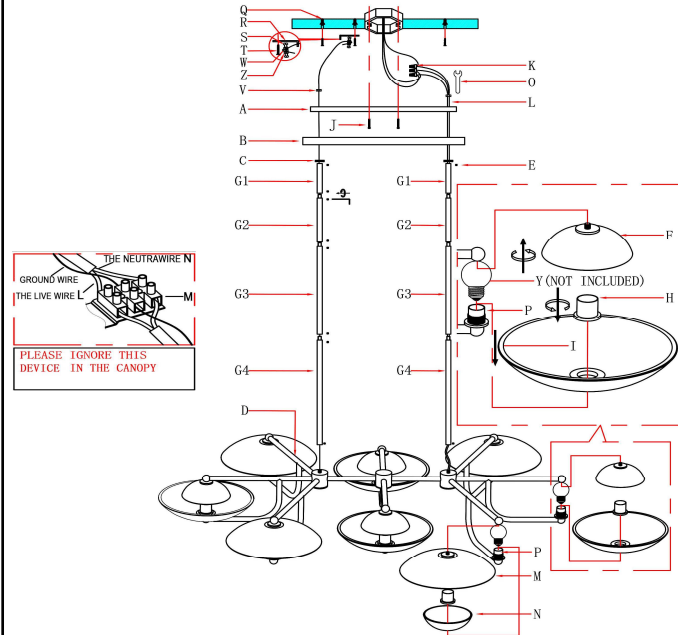

PARTS INCLUDED:

A MOUNTING PLATE	1 PC	N BOTTOM OPAL GLASS	4 PCS
B CANOPY	1 PC	L POWER WIRE	1 PC
C COLLAR LOOP	2 PCS	P SOCKET	8 PCS
D LAMP BODY	1 PC	R BRACKET	1 PC
E HEX SCREW	16 PCS	S SCREW	2 PCS
F TOP OPAL GLASS	4 PCS	W AIRCRAFT WIRE	1 PC
G1/G2/G3/G4 ROD	8 PCS	Z COUPLING	1 PC
H SOCKET CUP	8 PCS	V NUT	2 PCS
I BOTTOM CLEAR SEEDY GLASS	4 PCS	Y BULB(NOT INCLUDED)	8 PCS
M TOP CLEAR SEEDY GLASS	4 PCS		

HARDWARE INCLUDED:

K Plastic Wire Connector	U Allen Wrench
J Mounting Screws	S Wrench
Green Ground Screw	Q Anchor
T Strengthened Screw	

TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation of this chandelier.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

TO ASSEMBLE:

- Remove all packing contents and parts from the carton(s) carefully. Ensure you have all parts indicated before you begin assembly.
- Shut off the main electrical supply from the main fuse box/circuit breaker.
- Pass the power wire(l) through the rod (g4),(g3),(g2)&(g1),screw the rod(g4) to lamp body(d) till tight, repeat operation on the rod(g3),(g2) and g1). When connecting the rods, loosen the small hex screws(e) in the side hole then tighten with Allen wrench(u) after all rods are connected. Be sure all the hexangular screws are tight enough.
- Remove the coupling(z) from the aircraft wire(w) by loosening (2) screws(s). Pass the aircraft wire(w) through the rods screw the rod(g4) to lamp body(d) till tight, repeat operation on the rod(g3),(g2)and rod(g1). When connecting the rods, loosen the small hex screws(e) in the side hole first then tighten with Allen wrench(u) after all rods are connected. Be sure all the hexangular screws are tight enough.
- Put the collar loop(c) and canopy(b) into the rod (g1) in turn, then pass the power wire(l) through the mounting plate(a). Fix the rod(g1) and the mounting plate(a) by tighten nut(v) with a wrench(o). repeat the same operation on the other side.
- Pull the electrical cord of "j- box" through the exit hole of the mounting plate(a).
- Drill one hole on the ceiling and insert anchor(q) into drilled hole, then fix bracket(r) to the ceiling with strengthened screw (t) by screwing into anchor(q). Remove the coupling(z) from the aircraft wire(w) by loosening (2) screws(s). Pass the aircraft wire(w) through (2) holes on the bracket(r). Then pass the aircraft wire(w) through (2) holes on the coupling(z) and fix with (2) screws(s) (more details on next page). Be sure to tighten two screws attached on the coupling(z).
- Please pay special attention that you do not need to connect the wire connect device(m). It is used for the wire connection for euro-market.
- Inspect the fixture wires. The neutral wire has very fine ridges molded into its plastic covering. The hot wire has a smooth covering the bare silver wire is the grounded wire.
- Attach the ground wire from the fixture to the ground j-box wire from the outlet. Fasten together with a plastic wire connector (k) and wrap the connection with electrical tape. If your outlet box does not have a ground wire, insert the green ground screw into the mounting plate (a) facing down, and wrap the fixture's bare ground wire around the ground screw. It is imperative that the outlet box in your home be properly grounded.
- Connect the neutral fixture wire to the neutral junction box wire (usually white). Fasten each together with a wire connector (k) and wrap the connection with electrical tape. Be sure no strands are exposed.
- Connect the hot fixture wire to the hot junction box wire (usually black). Fasten each together with a plastic wire connector (k) and wrap the connection with electrical tape. Be sure no wire strands are exposed. Do not reverse the hot and neutral connections or safety will be compromised.
- Gently tuck the wire connections neatly into the junction box.
- First, drill two holes on the ceiling as per the desired holes of the mounting plate(a), then insert anchor(q) into drilled hole. Attach the mounting plate (a) with nipple to the ceiling outlet box using the mounting screws (j) and tighten screws with a screwdriver. Attach the strengthened screw(t) to the anchor (q) and fix the mounting plate(a) by tighten the screw(t) with a screwdriver.
- Push collar loop (c) in canopy (b) and thread onto the nipple in mounting plate (a) by turning in a clockwise direction.
- Attach the bottom clear seedy glass(l) on socket(p) then tighten with the socket cup(h) by turning in a clockwise direction.
- Attach the bottom opal glass(n) on socket(p) then tighten with the socket cup(h) by turning in a clockwise direction.
- Insert 8 type 60w bulb (or/cfl 12w or/led 10w, not included) into the socket(p).do not exceed specified wattage.
- Attach the top opal glass(f) on the lamp body (d) by turning in a clockwise direction.
- Attach the top clear seedy glass(m) on the lamp body (d) by turning in a clockwise direction.
- Restore power to the junction box and test fixture.

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIOS