


ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:

ITEM NO.: 49381	NAME: Decker Semi-Flush
MATERIAL TYPE: Linen	FINISH: White
SOCKET TYPE: E12	SOCKET QTY: 3
BULB WATTAGE: 40 W/10W CFL/9W LED	
VOLTAGE: 110-120 V	ITEM NET WEIGHT: 6LBS

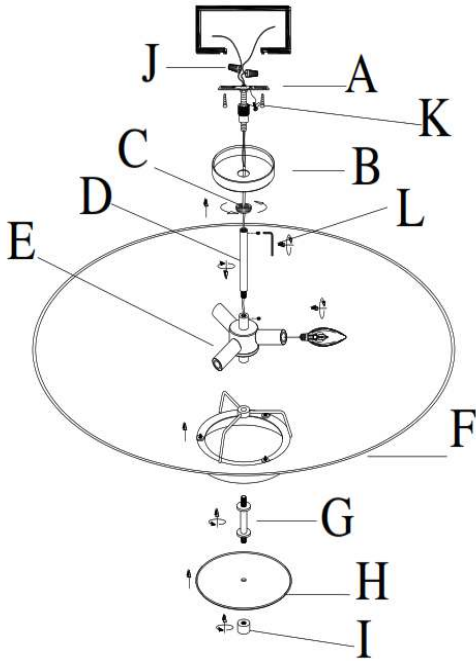

PARTS INCLUDED:

(A) Mounting Plate	Qty: 1	(F) Shade	Qty: 1
(B) Canopy	Qty: 1	(G) Pipe	Qty: 1
(C) Collar Loop	Qty: 1	(H) Diffuser	Qty: 1
(D) Rod	Qty: 1	(I) Finial	Qty: 1
(E) Socket Assembly	Qty: 1		

HARDWARE INCLUDED:

(J) Plastic Wire Connectc	2 Pc	(L) Allen Wrench	1 Pc
(K) Mounting Screws	2 Pcs	Green Ground Scr	1 Pc

TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

TO ASSEMBLE:

1. Remove all packing contents from the carton(s) carefully. Remove all parts from the package(s) carefully.
2. Shut off the main electrical supply from the main fuse box/circuit breaker.
3. Remove the mounting plate(a) from the canopy(b) by turning collar loop (c) in a counterclockwise direction.
4. Screw the rod(d) to the top of socket assembly(e) and tighten the hexangular screw in the side desire hole by Allen wrench(l).
5. Attach the shade(f) to the bottom of socket assembly(e), then screw the pipe(g) to the tight the shade(f)
6. Attach the diffuser(h) to the other end of pipe(g), then screw the finial(i) to hold the diffuser(h) till tight .be ensure it sit fully.
7. Carefully inspect the pendant's fixture wires. The neutral fixture wire has very fine ridges molded into its plastic covering. The hot fixture wire has a smooth covering. The bare silver wire is the grounded wire.
8. Pls weave the cords and brass wire into the chain loop as drawing show.
9. Attach the ground wire from the fixture to the ground junction box wire from the outlet (usually green) or bare wire). Fasten each together with a plastic wire connector (j) and wrap the connection with electrical tape. If your outlet box does not have a ground wire, insert the green ground screw into the mounting plate (a) facing down, and wrap the fixture's bare ground wire around the ground screw. It is imperative that the outlet box in your home be properly grounded.
10. Connect the neutral fixture wire to the neutral junction box wire (usually white). Fasten each together with a wire connector (j) and wrap the connection with electrical tape. Be sure no strands are exposed.
11. Connect the hot fixture wire to the hot junction box wire (usually black). Fasten each together.
12. With a plastic wire connector (j) and wrap the connection with electrical tape. Be sure no wire strands are exposed. Do not reverse the hot and neutral connections or safety will be compromised.
13. Gently tuck the wire connections neatly into the ceiling junction box.
14. Attach the mounting plate (a) with nipple to the ceiling outlet box using the enclosed mounting screws (k) and tighten screws with a screwdriver.
15. Push collar loop in canopy (b) and thread onto nipple in mounting plate (a) by turning in a clockwise
16. Screw rod (d) to canopy (b), using hexangular screw and Allen wrench(l) be sure all the hexangular screws are tight enough.
17. Insert 3 type b 40w bulbs (or suitable /cfl 10w or/led 9w bulbs, not included) in the sockets.do not exceed specified wattage. Restore power to junction box and test fixture.

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIOS