



## ASSEMBLY INSTRUCTIONS

### ITEM DESCRIPTION:

|                           |                           |
|---------------------------|---------------------------|
| ITEM NO.:DWC90            | NAME: London Sconce       |
| MATERIAL TYPE: IRON, ONYX | FINISH: ENGLISH BRONZE    |
| SOCKET TYPE: : LED        | SOCKET QTY: 1             |
| BULB WATTAGE: <b>14W</b>  |                           |
| VOLTAGE: 100V-120V        | ITEM NET WEIGHT: 12.3 LBS |

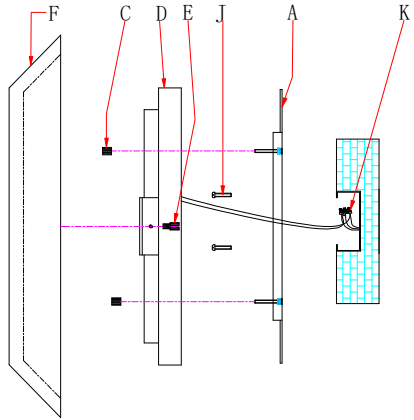

**PLEASE IGNORE THIS DEVICE ON THE BACK PLATE.**

### PARTS INCLUDED:

|                   |          |
|-------------------|----------|
| Mounting Plate(A) | Qty: 1PC |
| Back Plate(D)     | Qty: 1PC |
| Canopy Screw(C)   | Qty:4PCS |
| Onyx Shade (F)    | Qty:1PCS |
| Thumb-screw (E)   | Qty:2PCS |

### HARDWARE INCLUDED:

|                    |           |
|--------------------|-----------|
| Mounting Screw(J)  | Qty: 2PCS |
| Canopy Screw(C)    | Qty: 4PCS |
| Green Ground Screw | Qty: 1PC  |
| Wire Connector(K)  | Qty: 3PCS |

### TOOLS NEEDED (Not Included):

|               |
|---------------|
| 1 Screwdriver |
|---------------|

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.



We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

For customer service questions call 1-800-338-2150



### TO ASSEMBLE:

- Shut off the main electrical supply from the main fuse box/circuit breaker.
- Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly.
- Gently pull wiring down from junction box and allow to hang.
- Remove the mounting plate(A) from the back plate(D) by loosening the canopy screw (C) .
- Place the mounting plate(A) over the center of the junction box.
- Align the holes in the mounting plate (A) with the holes in the junction box and secure it with two mounting screws (J). Secure the screws using a Phillips head screwdriver.
- Connect ground wire from wall to ground wire from lamp using wire caps (K).
- Attach house wire to lamp wires as shown. Fasten the pairs together with a wire caps  
DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
- PLEASE PAY SPECIAL ATTENTION TO THE FACT THAT YOU DO NOT NEED TO CONNECT THE WIRE TO THE DEVICE (M). IT IS USED FOR WIRE CONNECTIONS IN THE EUROPEAN MARKET.
- Please note that this product is suitable for 0-10V dimmer switches. Connect the purple wire (+) and the gray wire (-) to the dimmer switch as shown in Figure 1. BE SURE NO STRANDS ARE EXPOSED.
- Gently tuck the wire connections(K) neatly into the junction box.
- Attach the back plate(D) to the mounting plate (A) with 4 canopy screws (C), then tighten .
- Place the Onyx Shade (F) on the lamp body and secure it with the thumb screws (E) as shown.
- Restore power to junction box and test fixture.

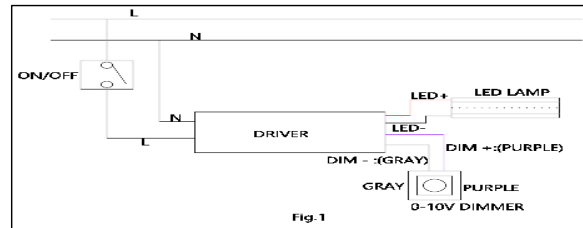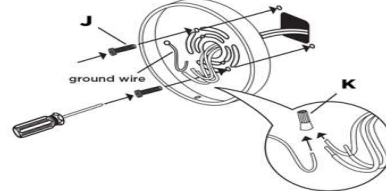

### CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

ARTERIO RS