


ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:

| | |
|----------------------------|------------------------------------|
| ITEM NO.: 89488 | NAME: Meridian Chandelier |
| MATERIAL TYPE: Iron/Glass | FINISH: Antique Brass, Clear Seedy |
| SOCKET TYPE: INTERATED LED | SOCKET QTY: 10 |
| BULB WATTAGE: 80 W | |
| VOLTAGE: 250 V | ITEM NET WEIGHT: 34.5 LBS |

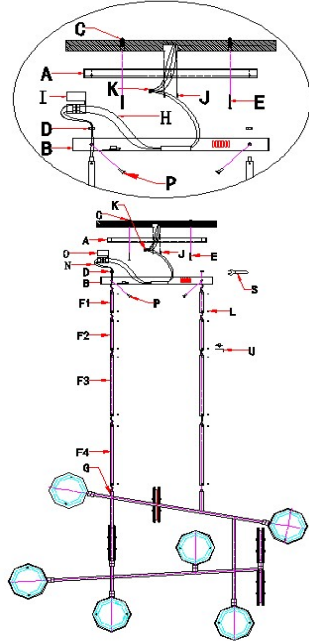

PARTS INCLUDED:

| | | |
|--------------------|------|--------|
| A. MOUNTING PLATE | Qty: | 1PC |
| B. CANOPY | Qty: | 1 PC |
| D. HEX NUTS | Qty: | 2 PCS |
| F1F2F3F4. RODS | Qty: | 2 PCS |
| G. LAMP BODY | Qty: | 1 PC |
| H. POWER CABLE | Qty: | 1 PC |
| I. 2-WIRE TERMINAL | Qty: | 1 PC |
| L. HEX SCREWS | Qty: | 36 PCS |
| P. SCREWS | Qty: | 4PCS |
| Q. METAL SHEET | Qty: | 1 PC |

HARDWARE INCLUDED:


| | | | |
|------------------------|---|--------------|---|
| Mounting Screws | 2 | Allen Wrench | 1 |
| Plastic Wire Connector | 2 | | |
| Green Ground Screw | 1 | | |

TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

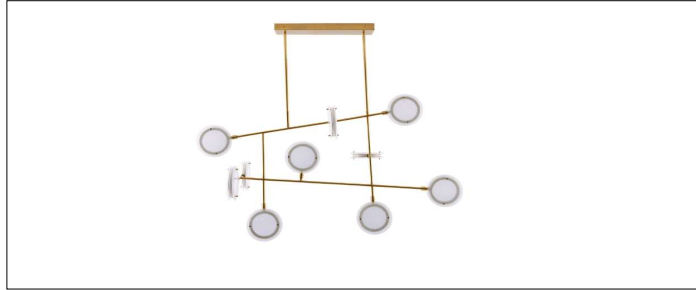

1. Remove all packing contents and parts from the carton(s) carefully.
2. Please be sure you have all parts indicated before you begin assembly.
3. Shut off the main electrical supply from the main fuse box/circuit breaker.
4. Screw the rod(f4) to lamp body(g) till tight, repeat the same operation on the rod(f1), rod(f2) and rod(f3) when you connect the rods, loosen the small hex screws(l) in the side hole first then tighten with Allen wrench(u) after all rods are connected. Be sure all the hexangular screws are tight enough.
5. Position fixture in desired location on ceiling. The mounting plate features (2) holes for screw mounting. Mark these spots on the ceiling with a pencil to drill holes. Drill 2 holes on these spots and insert anchors(c) into drilled holes.
6. Pull the electrical cord of "j box" through the exit hole of the mounting plate(a). Please pay special attention that you do not need to connect the wire connect device(m). It is used for the wire connection for euro-market.
7. Carefully inspect the fixture wires. The neutral fixture wire has very fine ridges molded into its plastic covering. The hot fixture wire has a smooth covering. The bare silver wire is the grounded wire.
8. Attach the ground wire from the fixture to the ground junction box wire from the outlet (usually green or bare wire). Fasten each together with a plastic wire connector (k) and wrap the connection with electrical tape. If your outlet box does not have a ground wire, insert the green ground screw into the mounting plate (a) facing down, and wrap the fixture's bare ground wire around the ground screw. It is imperative that the outlet box in your home be properly grounded.
9. Connect the neutral fixture wire to the neutral junction box wire (usually white). Fasten each together with a wire connector (k) and wrap the connection with electrical tape. Be sure no strands are exposed.
10. Connect the hot fixture wire to the hot junction box wire (usually black). Fasten each together with a plastic wire connector (k) and wrap the connection with electrical tape. Be sure no wire strands are exposed. Do not reverse the hot and neutral connections or safety will be compromised.
11. Connect the lamp input power cable(h) (usually black and white wire, according to the principle of connecting the black wire to the + pole and the white wire to the -pole) to the 2-wire terminal (i), and then cover the 2-wire terminal (i) cap.
12. Gently tuck the wire connections neatly into the junction box.
13. Attach the mounting plate (a) to the ceiling outlet box using the enclosed mounting screws (j) and tighten screws(j) with a screwdriver then secure mounting plate (a) on the ceiling by inserting 2pcs strengthened screws(e) into the anchor(c) and then tighten strengthened screws (e) with a screwdriver.
14. Put the metal sheet (q) and canopy(b) into the rod (f1) in turn and tighten the hex nut (d) with a wrench (s). Repeat the same operations (7) on another side.
15. Attach canopy(b) to the mounting plate(a) by using the screws(p). Tighten screws with screwdriver.
16. Restore power to the junction box and test fixture.
17. For non-user replaceable light sources: the light source contained in this luminaire shall only be replace by the manufacturer or his service agent or a similar qualified person.

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.