


ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:

ITEM NO.: DB79000-885	NAME: Piloti Floor Lamp
MATERIAL TYPE: Steel	FINISH: Bronze
SOCKET TYPE: E26	SOCKET QTY: 1
BULB WATTAGE: 150W/CFL 35W/LED 28W	
VOLTAGE: 110-120 V	ITEM NET WEIGHT: 55LBS

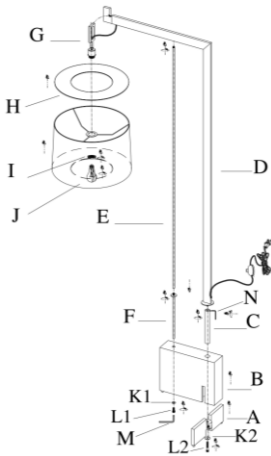

PARTS INCLUDED:

Loader (A)	Qty: 1
Base (B)	Qty: 1
Connect Tube (C)	Qty: 1
L Frame (D)	Qty: 1
Support Rod (E)	Qty: 1
Connect Rod (F)	Qty: 1
Socket Assembly (G)	Qty: 1
Diffuser (H)	Qty: 1
Socket Ring (I)	Qty: 1
Shade (J)	Qty: 1
Washer (K)	Qty: 2
Threading Nut (L)	Qty: 2
Wrench (M)	
Allen Wrench (N)	

PRE-ASSEMBLY:

- Remove all parts and hardware from box along with any plastic protecting packaging
- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.



TO ASSEMBLE:

- Remove all packing contents and parts from the carton carefully
- Pull excess wire through the column before assembling the lamp.
- Screw the connect tube(C) on the bottom of frame(D) and tighten hexangular screw with allen wrench(N)
- Screw the support rod(E) to the frame(D), and then screw connect rod(F) to the support rod(E).
- Unscrew washers(K1)(K2) and threading nut(L1)(L2) off connect tube(C) and connect rod(F) by wrench(M), and align the loader(A) into the slot of poly base(B), and then insert the connect rod(f) and connect tube(C) into the poly base(B) carefully.
- Reverse the above operation, use the washers (K1)(K2) and threading nut(L1)(L2) to screw the connect tube(B) and rod(F) to the base until tight by wrench(M)
- Hang the socket assembly (G) to the hook.
- Unscrew the socket ring(I) then attach diffuser (H) and shade (J) to the socket, then tighten the shade by using socket ring(I)
- Insert 1 type a 100w bulb (or suitable CFL 26W OR LED 20W bulb) into the socket. DO NOT EXCEED SPECIFIED WATTAGE.

CARE INSTRUCTIONS:

- Clean with soft, dry cloth.
- Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the lamp.

IMPORTANT SAFETY INSTRUCTIONS:

For safety purposes, this lamp is equipped with a polarized plug (one blade is wider than the other) (For North America Customers Only). If the plug does not fit securely into your outlet, do not force it – contact a professional electrician. Use the plug with an extension cord only if it can be fully inserted into the cord's socket. Never alter the plug in any way. This instruction is provided for your safety. It is important that it is read carefully and completely before assembling the fixture. To avoid risk of fire, do not exceed the recommended wattage.

WARNING:

- To reduce the risk of fire, electrical shock, or personal injury, always turn off and unplug lamp and allow it to cool prior to replacing the bulb. Do not touch bulb when fixture is turned on. Do not look directly at lit bulb. Keep flammable materials away from lit bulb.

For customer service questions call 1-800-338-2150

ARTERIO RS