


ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:

ITEM NO.: DFC15	NAME: GISELLE FLUSH MOUNT
MATERIAL TYPE: METAL	FINISH: ANTIQUE BRSS
SOCKET TYPE: E12	SOCKET QTY: 6
BULB WATTAGE: Type B 60W	
VOLTAGE: 100V-120V	ITEM NET WEIGHT: 17.8 LBS

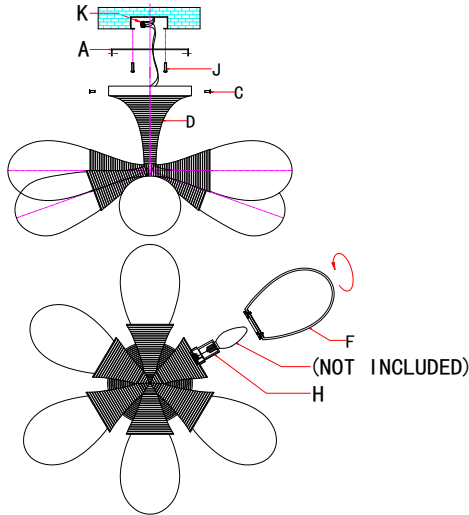

PARTS INCLUDED:

Mounting Plate (A)	Qty: 1PC
Canopy Screw (C)	Qty: 2PCS
Lamp Body (D)	Qty: 1PC
Glass Shade (F)	Qty: 6PCS
Socket (H)	Qty: 6PCS
Mounting Screw (J)	Qty: 2PCS
Plastic Wire Connector (K)	Qty: 3PCS

HARDWARE INCLUDED:

Mounting Screws	2
Plastic Wire Connector	3
Green Ground Screw	1

TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.



TO ASSEMBLE:

1. Shut off the main electrical supply from the main fuse box/circuit breaker.
2. Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly.
3. Gently pull wiring down from ceiling junction box and allow to hang.
4. Remove the mounting plate (A) from the lamp body (D) by loosening the canopy screw (C) using a Phillips screwdriver.
5. Place the mounting plate (A) over the center of the ceiling junction box.
6. Align holes in mounting plate (A) with holes in junction box and attach with two mounting screws (J). Secure screws with a Phillips head screwdriver.
7. Carefully inspect the flush mount's fixture wires.
Neutral fixture wire: White
Hot fixture wire: Black
Ground wire: Bare wire
8. Wrap ground wire of lamp assembly and ground wire of junction box together and fasten together with a wire nut and wrap the connection with electrical tape.
9. Attach the neutral fixture wire from the flush mount to the neutral junction box wire (usually white). Fasten each together with a wire nut and wrap the connection with electrical tape.
10. Attach the hot fixture wire from the flush mount to the hot junction box wire (usually black). Fasten each together with a wire nut and wrap the connection with electrical tape.
DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
11. Gently tuck the wire connections (K) neatly into the ceiling junction box.
12. Attach the Lamp Body (D) onto the mounting plate (A) using 2 canopy screws (C), and tighten them with a screwdriver.
13. Insert 6 TYPE B 60W bulbs (OR /CFL 12W OR /LED 10W, not included) into the socket (H).
DO NOT EXCEED THE SPECIFIED WATTAGE.
14. Attach the glass shade (F) to the socket (H) by turning clockwise until it is tight.
15. Restore power to the junction box and test fixture.

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIO RS