


ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:

ITEM NO.: DMC25	NAME: DANTE MEDIUM CHANDELIER
MATERIAL TYPE: STEEL	FINISH: ANTIQUE BRASS
SOCKET TYPE: E26	SOCKET QTY: 5
BULB WATTAGE: 60W/16W CFL/13W LED	
VOLTAGE: 110-120V	ITEM NET WEIGHT: 32lbs

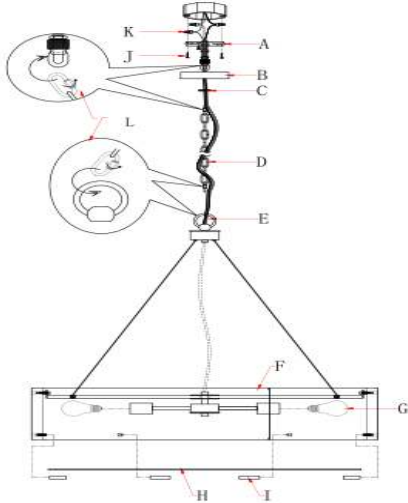

PARTS INCLUDED:

Mounting Plate (A)	Qty: 1pc	Lamp Body (F)	Qty: 1pc
Canopy (B)	Qty: 1pc	Bulb (not included) (G)	Qty: 5pcs
Collar Loop (C)	Qty: 1pc	Acrylic Diffuser(H)	Qty: 1pc
Chain (D)	Qty: 1pc	Peg(I)	Qty: 6pcs
Loop(E)	Qty: 1pc	Quick Link(L)	Qty: 2pcs

HARDWARE INCLUDED:

Mounting Screws(J)	Qty: 3pcs	Plastic Wire Connector(K)	Qty: 4pcs
--------------------	-----------	---------------------------	-----------

TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.



TO ASSEMBLE:

1. Shut off the main electrical supply from the main fuse box/circuit breaker.
2. Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly.
3. Gently pull wiring down from ceiling junction box and allow to hang.
4. Remove mounting plate(A) from the canopy(B) by unscrewing the collar loop(C).
5. Carefully inspect the pendant's fixture wires. **Neutral fixture wire: White; Hot fixture wire: Black ; Ground wire: Green**
6. Wrap ground wire of lamp assembly and ground wire of junction box together and fasten together with a wire nut and wrap the connection with electrical tape.
7. Attach the neutral fixture wire from the pendant to the neutral junction box wire (usually white). Fasten each together with a wire nut and wrap the connection with electrical tape.
8. Attach the hot fixture wire from the pendant to the hot junction box wire (usually black). Fasten each together with a wire nut and wrap the connection with electrical tape. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
9. Gently tuck the wire connections neatly into the ceiling junction box.
10. Attach the mounting plate(A) with nipple to the ceiling outlet box using the enclosed mounting screws(J) and tighten screws with a screwdriver .
11. Push collar loop(C) through hole in canopy and thread onto nipple on mounting plate(A). Secure by turning collar clockwise until canopy is flush with the ceiling.
12. Connect the canopy(B) and collar loop(C) with chain by quick link(L).
13. Connect lamp body(F) with chain by quick link(L) through loop(E) and then place acrylic diffuser(H) into lamp body by screwing the peg(I) .
14. Place the fixture wire through chain exit from the canopy.
15. Insert 5 type A 60W bulb(not included)into the sockets. **DO NOT EXCEED SPECIFIED WATTAGE OF PENDANT.**

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.