

ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:

ITEM NO.: DMC32	NAME:KLAUS LARGE CHANDELIER
MATERIAL TYPE: METAL	FINISH: ANTIQUE BRASS
SOCKET TYPE: E12	SOCKET QTY:12
BULB WATTAGE: TYPE B 60W	
VOLTAGE: 100V-120V	ITEM NET WEIGHT: 52.8LBS

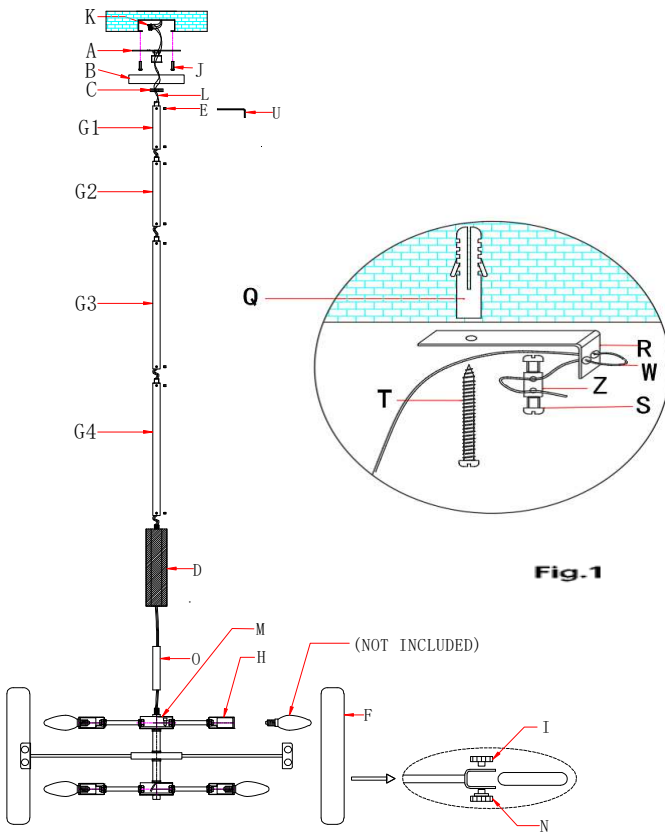


Fig.1

PARTS INCLUDED:

Mounting Plate(A)	Qty:1PC	Power Wire(L)	Qty:1PC
Canopy(B)	Qty:1PC	Lamp Body (M)	Qty:1PC
Collar(C)	Qty:1PC	Mounting Screw(J)	Qty:2PCS
Hexagonal Metal Post (D)	Qty:1PC	Rod (O)	Qty:1PC
Hex Screw (E)	Qty:8PCS	Anchor (Q)	Qty:1PC
Glass Panel (F)	Qty:54PCS	Bracket(R)	Qty:1PC
Rod (G1,G2,G3,G4)	Qty:4PCS	Screw(S)	Qty:1PC
Socket(H)	Qty:12PCS	Strengthened Screw (T)	Qty:1PC
Thumb-Screw A (I)	Qty:54PC	Aircraft Wire(W)	Qty:1PC
Thumb-Screw B(N)	Qty:54PCS	Coupling(Z)	Qty:1PC
Wire Connector(K)	Qty:3PCS	Allen Wrench(U)	Qty:1PC

HARDWARE INCLUDED:

Mounting Screws	2	Hexangular Screw	8
Plastic Wire Connector	3	Allen Wrench	1
Green Ground Screw	1		

TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver
- Allen Wrench

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.



TO ASSEMBLE:

1. Shut off the main electrical supply from the main fuse box/ circuit breaker.
2. Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly.
3. Gently pull wiring down from ceiling junction box and allow to hang.
4. Remove mounting plate(A) from the canopy(B) by unscrewing the collar (C).
5. Pass the power wire (L) through the Rod (O), the hexagon metal post(D), the rods (G4), (G3), (G2), and (G1) in turn. Screw the Rod (O) and the hexagon metal post(D) to the lamp body (M) till tight. Then screw the rod (G4) to the hexagon metal post(D) until tight. Repeat the same operation with rods (G3), (G2), and (G1). When you connect the rods, loosen the small hex screws (E) in the side hole first, then tighten them with an Allen wrench (U) after all rods are connected. Ensure that all the hexagonal screws are tightened securely.
6. Put the collar loop (C) and canopy (B) onto the rod (G1) in sequence, then thread the power wire (L) through the mounting plate (A). Secure the rod (G1) to the nipple of the mounting plate (A) until it is tight.
7. Attach the aircraft wire (W) to a solid structure in accordance with the local building code. Position the bracket(R) at the desired location on the ceiling and mark a spot with a pencil to drill a hole. Drill one hole at the marked spot and insert the anchor(Q) into the drilled hole. Fix bracket (R) with a strengthened screw (T) by screwing it into anchor (Q). Remove the coupling (Z) from the aircraft wire (W) by loosening 2 screws (S) before installation. Pass the aircraft wire (W) through 2 holes on the bracket (R), then pass the aircraft wire (W) through 2 holes on the coupling (Z) and secure it with 2 screws (S) as shown in Fig. 1. Then, tighten the two screws (S) with a screwdriver. Be sure to tighten the two screws attached to the coupling (Z).
8. Pull the electrical cord of "J box" through the exit hole of the mounting plate(A).
9. Carefully inspect the chandelier's fixture wires.
Neutral fixture wire: It has very fine ridges molded into its plastic covering.
Hot fixture wire: It has a smooth covering
Ground wire: Bare wire
10. Wrap ground wire of lamp assembly and ground wire of junction box together and fasten together with a wire connector(K) and wrap the connection with electrical tape.
11. Attach the neutral fixture wire from the chandelier to the neutral junction box wire. Fasten each together with a wire connector(K) and wrap the connection with electrical tape.
12. Attach the hot fixture wire from the chandelier to the hot junction box wire. Fasten each together with a wire connector(K) and wrap the connection with electrical tape.

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.

13. Gently tuck the wire connections(K) neatly into the ceiling junction box.
14. Place the mounting plate(A) over the center of the ceiling junction box.
15. Align holes in mounting plate(A) with holes in junction box and attach with two mounting screws(J). Secure screws with a Phillips head screwdriver.
16. Push canopy(B) up over the mounting plate(A) until it is flush with the ceiling.
17. Push collar (C) through hole in canopy(B) and thread onto nipple on the mounting plate(A). Secure by turning collar(C) clockwise until canopy(B) is flush with the ceiling.
18. Insert 12 TYPE B 60W bulbs (or /CFL 12W OR /LED 10W, not included) into socket(H).

DO NOT EXCEED THE SPECIFIED WATTAGE.

19. Attached the glass panel (F) on the lamp body(M), then fix it with 2 sets of the thumb-screw A (I) and thumb-screw B(N). Repeat the same operation on the other glass panels(F).

20. Restore power to junction box and test fixture.

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.
