

ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:


ITEM NO.: DMS15 NAME: CABRERA PENDANT

MATERIAL TYPE: Wicker, Metal FINISH: Natural

SOCKET TYPE: E26 SOCKET QTY: 1


BULB WATTAGE: 60W VOLATGE: 110-120V

ITEM NET WEIGHT: 6.2 LBS

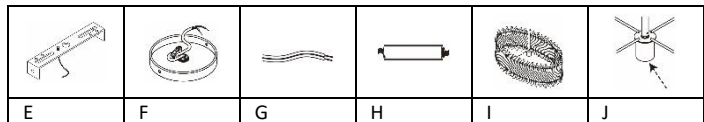

PARTS INCLUDED:

MOUNTING PLATE	(E)	QTY 1
CANOPY	(F)	QTY 1
FIXTURE WIRE	(G)	QTY 1
PIPE KIT	(H)	QTY 3
SHADE	(I)	QTY 1
SOCKET	(J)	QTY 1

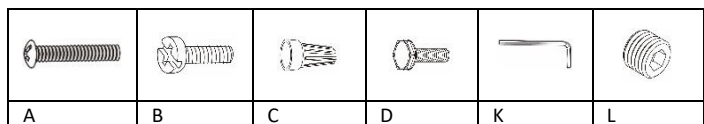

HARDWARE INCLUDED:


Mounting Screws	(A)	QTY 2
Canopy Screws	(B)	QTY 2
Plastic Wire Connector	(C)	QTY 3
Green Ground Screw	(D)	QTY 1
Allen Wrench	(K)	QTY 1
Set Screw	(L)	QTY 3

TO INSTALL YOU WILL NEED:

• 2 people recommended. • Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

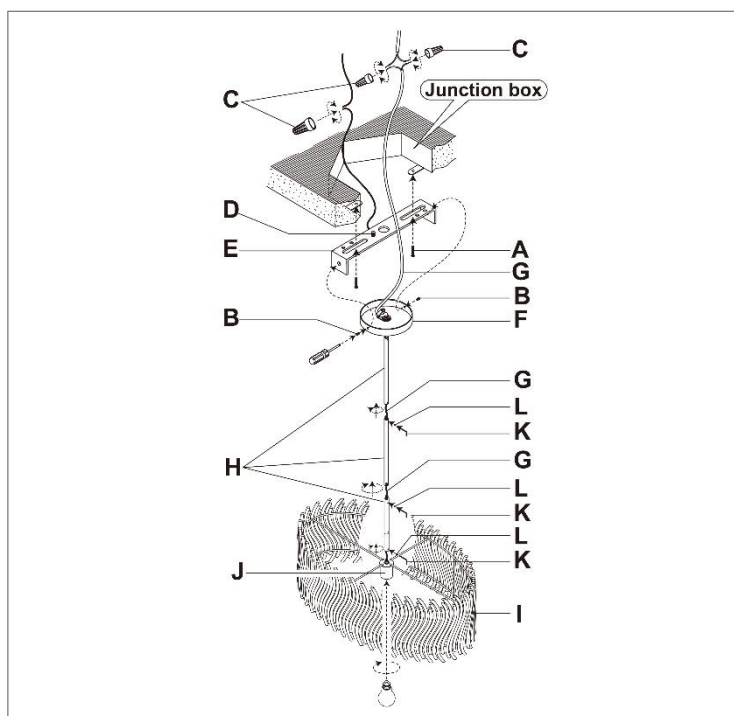

TO ASSEMBLE:

- Shut off the main electrical supply from the main fuse box/ circuit breaker.
- Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly.
- Gently pull wiring down from ceiling junction box and allow to hang.
- Remove mounting plate from the canopy by unscrewing the collar.
- Carefully inspect the pendant's fixture wires.
Neutral fixture wire: White
Hot fixture wire: Black
Ground wire: Green
- Wrap ground wire of lamp assembly and ground wire of junction box together and fasten together with a wire nut and wrap the connection with electrical tape.
- Attach the neutral fixture wire from the pendant to the neutral junction box wire (usually white). Fasten together with a wire nut and wrap the connection with electrical tape.
- Attach the hot fixture wire from the pendant to the hot junction box wire (usually black). Fasten each together with a wire nut and wrap the connection with electrical tape.
DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
- Gently tuck the wire connections neatly into the ceiling junction box.
- Place the mounting plate over the center of the ceiling junction box.
- Align holes in mounting plate with holes in junction box and attach with two mounting bolts. Secure with a Phillips head screwdriver.
- Push canopy up over the mounting plate until it is flush with the ceiling.
- Push collar through hole in canopy and thread onto nipple on the mounting plate. Secure by turning collar clockwise until canopy is flush with the ceiling.
- Restore power to junction box and test fixture. Insert 60W bulb into fixture.

DO NOT EXCEED SPECIFIED WATTAGE OF PENDANT.

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.