


# ASSEMBLY INSTRUCTIONS

## ITEM DESCRIPTION:

|                              |                         |
|------------------------------|-------------------------|
| ITEM NO.:DPC16               | NAME: ESTATE PENDANT    |
|                              | FINISH: ANTIQUE BRASS   |
| MATERIAL TYPE: METAL+ CRYSTA | +SMOKE CRYSTAL          |
| SOCKET TYPE: LED             | SOCKET QTY: 1           |
| BULB WATTAGE: 11W            |                         |
| VOLTAGE: 100V-120V           | ITEM NET WEIGHT: 34 LBS |

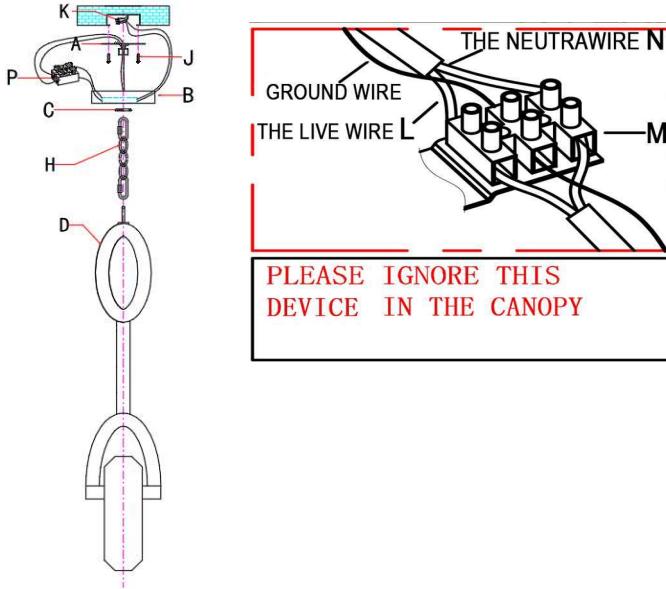

## PARTS INCLUDED:

|                           |          |
|---------------------------|----------|
| Mounting Plate (A)        | Qty:1PC  |
| Canopy(B)                 | Qty:1PC  |
| Collar(C)                 | Qty:1PC  |
| Lamp Body (D)             | Qty:1PC  |
| Chain(H)                  | Qty:1PC  |
| Mounting Screw(J)         | Qty:2PCS |
| Plastic Wire Connector(K) | Qty:3PCS |
| Fast Connector (P)        | Qty:1PC  |

## HARDWARE INCLUDED:

|                        |   |
|------------------------|---|
| Mounting Screws        | 2 |
| Plastic Wire Connector | 3 |
| Green Ground Screw     | 1 |

## TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver
- Allen Wrench

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation of this chandelier.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.



## TO ASSEMBLE:

1. Shut off the main electrical supply from the main fuse box/ circuit breaker.
  2. Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly.
  3. Gently pull wiring down from ceiling junction box and allow to hang.
  4. Remove mounting plate from the canopy by unscrewing the collar.
  5. PLEASE PAY SPECIAL ATTENTION THAT YOU DO NOT NEED TO CONNECT THE WIRE CONNECT DEVICE(M). IT IS USED FOR THE WIRE CONNECTION FOR EURO-MARKET.
  6. Carefully inspect the pendant's fixture wires.  
Neutral fixture wire: White  
Hot fixture wire: Black  
Ground wire: Bare wire
  7. Wrap ground wire of lamp assembly and ground wire of junction box together and fasten together with a wire nut and wrap the connection with electrical tape.
  8. Attach the neutral fixture wire from the pendant to the neutral junction box wire (usually white). Fasten each together with a wire nut and wrap the connection with electrical tape.
  9. Attach the hot fixture wire from the pendant to the hot junction box wire (usually black). Fasten each together with a wire nut and wrap the connection with electrical tape.
- DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
10. Connect the power wires of the lamp together using the fast connector (P). Connect the black wire to the positive electrode and the white wire to the negative electrode of the fast connector (P).
  11. Gently tuck the wire connections(K) neatly into the ceiling junction box.
  12. Place the mounting plate(A) over the center of the ceiling junction box.
  13. Align holes in mounting plate(A) with holes in junction box and attach with two mounting bolts(J). Secure bolts with a Phillips head screwdriver.
  14. Push canopy up over the mounting plate until it is flush with the ceiling.
  15. Push collar through hole in canopy and thread onto nipple on the mounting plate. Secure by turning collar clockwise until canopy is flush with the ceiling.
  16. Connect the canopy(B) and Lamp body(D) together with chain(H).
  17. Restore power to junction box and test fixture.

## CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIO RS