


# ASSEMBLY INSTRUCTIONS

## ITEM DESCRIPTION:

ITEM NO.: DSC12	NAME: ROSEMONT PENDANT -16"
MATERIAL TYPE: IRON, GLASS, ALABASTER	FINISH: ENGLISH BRONZE, MATTE SWIRL
SOCKET TYPE: E26	SOCKET QTY: 1
BULB WATTAGE: 60W /13W CFL/8W LED	
VOLTAGE: 110V-120V	ITEM NET WEIGHT: 27.5LBS

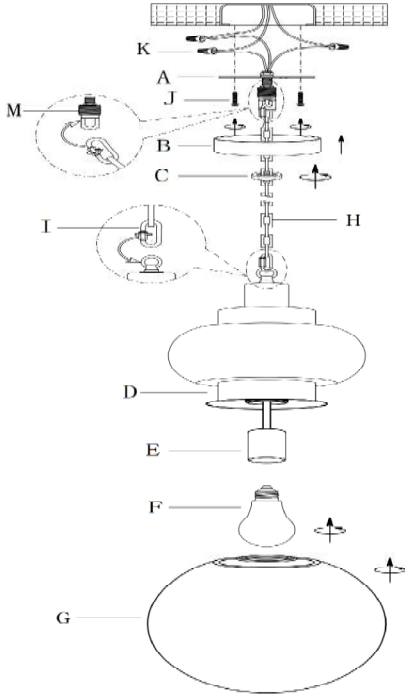

## PARTS INCLUDED:

Mounting Plate (A)	Qty: 1Pc	Glass Shade (G)	Qty: 1Pc
Canopy (B)	Qty: 1Pc	Chain (H)	Qty: 1Pc
Collar Ring (C)	Qty: 1Pc	Quick Link (I)	Qty: 2Pcs
Lamp Body (D)	Qty: 1Pc	Collar Loop (M)	Qty: 1Pc
Socket (E)	Qty: 1Pc		

## HARDWARE INCLUDED:

Mounting Screws (J)	Qty : 2Pcs	Canopy Screws
Plastic Wire Connector(K)	Qty : 3Pcs	Allen Wrench
Green Ground Screw	Qty : 1Pc	

## TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.



## TO ASSEMBLE:

1. Shut off the main electrical supply from the main fuse box/circuit breaker.
2. Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly.
3. Gently pull wiring down from ceiling junction box and allow to hang.
4. Remove mounting plate from the canopy by unscrewing the collar.
5. Connect the lamp body(D) to one side of the chain(H) by using one of the quick link(I) provided.
6. **Carefully inspect the pendant's fixture wires. Neutral fixture wire: White Hot fixture wire: Black Ground wire: Green**
7. Wrap ground wire of lamp assembly and ground wire of junction box together and fasten together with a wire connector(K) and wrap the connection with electrical tape.
8. Attach the neutral fixture wire from the pendant to the neutral junctionbox wire (usually white). Fasten each together with a connector(K) and wrap the connection with electrical tape.
9. Attach the hot fixture wire from the pendant to the hot junction box wire (usually black). Fasten each together with a wire nut and wrap the connection with electrical tape. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
10. Gently tuck the wire connections neatly into the ceiling junction box.
11. Attach the mounting plate (A) with collar loop(M) to the outlet box by using the mounting screws(J) and tighten screws with a screwdriver.
12. Pass the chain(H) through the collar loop ring(C) and canopy(B) in turn, then connect the chain(H) to the collar loop(M) by another quick link(I).
13. Push collar loop ring(C) and canopy (B) up to the ceiling and tighten onto the nipple in mounting plate (A) by turning in a clockwise direction.
14. Insert 1 TYPE-A 60W /13W CFL/8W LED bulb(not included) into socket(E). **DO NOT EXCEED SPECIFIED WATTAGE OF PENDANT.**
15. Attach the glass shade(G) to the lamp body(D) and tighten glass shade(G) in a clockwise direction gently.
16. Restore power to junction box and test fixture.

## CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIOORS