

ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:


ITEM NO.: DWC39 NAME: Everest Outdoor Sconce

MATERIAL TYPE: Brass&Alum/Glass FINISH: Aged Iron/Opal

SOCKET TYPE:E26 Ceramic SOCKET QTY: 1 PC

BULB WATTAGE: TYPE A 60W or /LED 13W

VOLTAGE: 110V-120V ITEM NET WEIGHT:

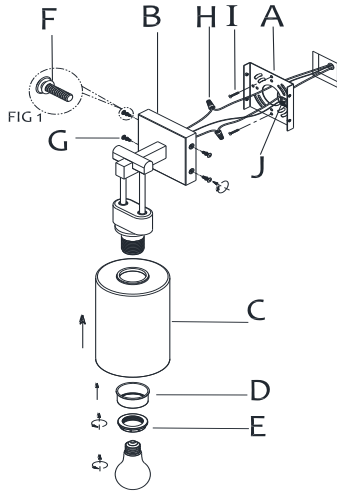

PARTS INCLUDED:

Mounting Plate(A)	Qty: 1PC
Back Plate(B)	Qty: 1PC
Glass Shade(C)	Qty: 1PC
Cup(D)	Qty: 1PC
Socket Ring(E)	Qty: 1PC
Rubber Loop(F)	Qty: 4PCS
Canopy Screw(G)	Qty: 4PCS

HARDWARE INCLUDED:

Mounting Screws(I)	Qty: 2PCS
Plastics Wire Cap(H)	Qty: 3PCS
Ground Screw(J)	Qty: 1 PC

TOOLS NEEDED (Not Included):

1 Screwdriver


These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.



TO ASSEMBLE:

- 1.Shut off the main electrical supply from the main fuse box/circuit breaker.
2. Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly.
3. Before Assembling, it is important that PLS be ensure the Rubber loops(F) on the top threading of Plate Screws(G) as Fig 1 shown.
4. Unscrew Socket Ring(E) and Cup(D) off the socket, and attach the glass shade(C)to the socket, then use cup and socket ring to secure the shade till tight.
- 5.Pull the electrical cord of "J BOX" through the exit hole of the Mounting Plate(A).
6. Attach Mounting plate(A) to the junction box using mounting screws (I).
7. Connect ground wire from wall to ground wire from lamp using wire caps (H).
8. Attach house wire to lamp wires as shown. Fasten the pairs together with a wire caps
- DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
9. Attach front face of light to back plate by inserting canopy screws (G) through predrilled holes in front face and into back plate as shown. Tighten using screwdriver.
10. Insert one TYPE A 60W bulb(or suitable LED 13W bulb,NOT INCLUDED) in the socket.
- DO NOT EXCEED SPECIFIED WATTAGE**
11. Restore power to junction box and test fixture.

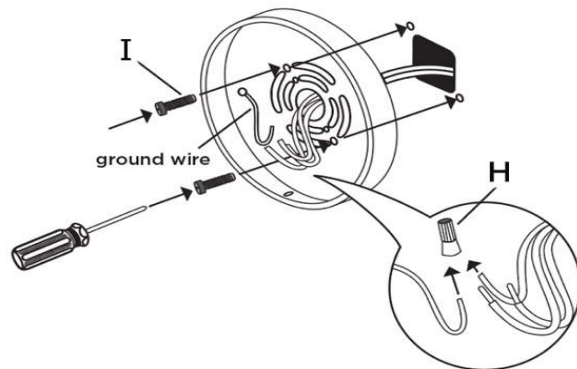


CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIO RS

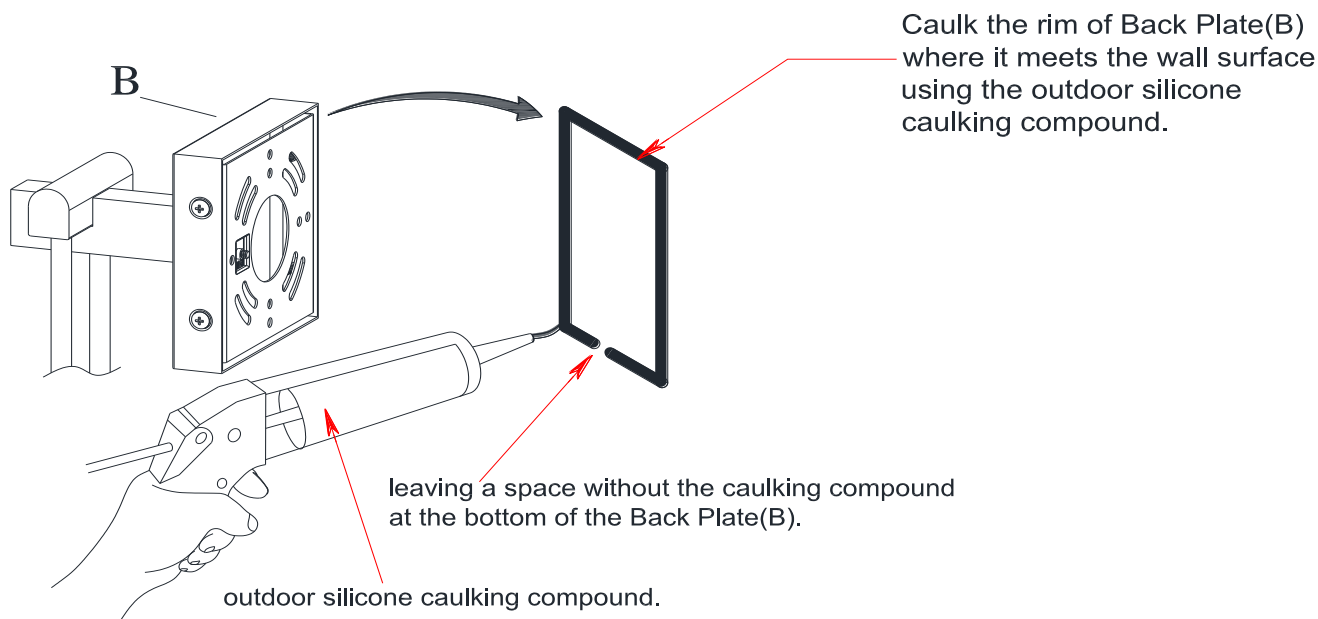

To prevent the water from entering the J-box and causing a short circuit, use the outdoor silicone caulking compound to caulk completely along the rim of Back Plate (B) where it meets the wall surface, but leaving a space without the caulking compound at the bottom of Back Plate (B).

NOTE: Mounting surface should be clean, dry, flat, and a 1/4 inch larger than the Back Plate (B) on all sides.

OUTDOOR INSTALLATION

Use silicone caulk to seal fixture where the mounting plate meets the surface to prevent water from seeping in.