

ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:

ITEM NO.: DWC87

NAME: Lucien Sconce

MATERIAL TYPE: IRON, GLASS, LEATHER

FINISH: ANTIQUE BRASS, SEEDY


SOCKET TYPE: : E12

SOCKET QTY: 1

BULB WATTAGE: TYPE B 60W / CFL 12W /LED 10W

VOLTAGE: 110V-120V

NET WEIGHT: 3.5 LBS

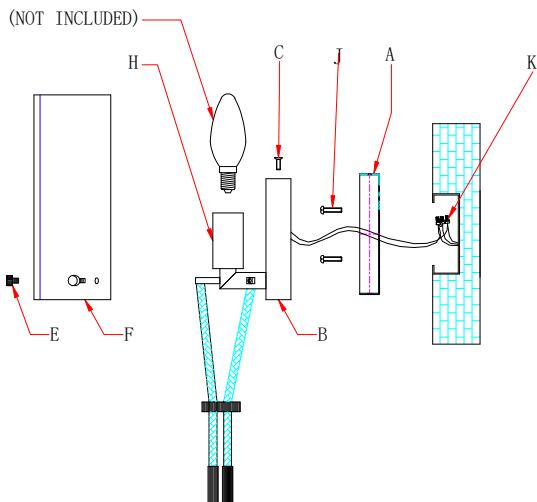

PARTS INCLUDED:

Mounting Plate(A) Qty: 1PC

Back Plate(B) Qty: 1PC

Canopy Screw(C) Qty: 2PCS

Thumb-screw (E) Qty: 3PCS

Glass shade (F) Qty: 1PCS

Socket(H) Qty: 1PCS

HARDWARE INCLUDED:

Mounting Screw(J) Qty: 2PCS

Canopy Screws Qty: 2PCS

Green Ground Screw Qty: 1PC

Plastic Wire Connector(K) Qty: 3PCS

TOOLS NEEDED (Not Included):

1 Screwdriver


These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.



TO ASSEMBLE:

1. Shut off the main electrical supply from the main fuse box/circuit breaker.
2. Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly.
3. Remove mounting plate(A) from the back plate(B) by loosening the canopy screw (C) using a Phillips screwdriver.
4. Place the mounting plate(A) over the center of the junction box.
5. Align the holes in the mounting plate (A) with the holes in the junction box and secure it with two mounting screws (J). Secure the screws using a Phillips head screwdriver.
6. Connect ground wire from wall to ground wire from lamp using wire caps (K).
7. Attach house wire to lamp wires as shown. Fasten the pairs together with a wire caps. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
8. Gently tuck the wire connections(K) neatly into the junction box.
9. Attach the backplate (B) to mounting plate (A) by inserting canopy screws (C) through predrilled holes as shown. Tighten using screwdriver.
10. Insert 1 type A 60W bulb (or/CFL 12W or/LED 10W(not included)) into the socket(H). **DO NOT EXCEED SPECIFIED MAX WATTAGE.**
11. Place the glass shade (F) on the lamp body and secure with thumb screws (E).
12. Restore power to junction box and test fixture.

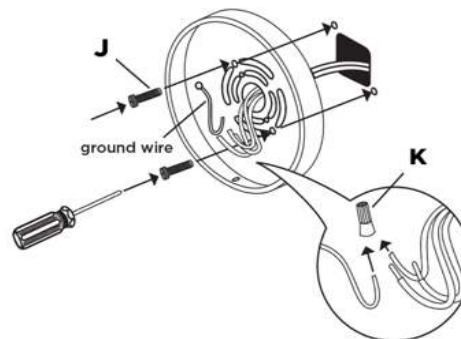

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.