

ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:

ITEM NO.: DWC95

NAME: NATALIA SCONCE

MATERIAL TYPE: IRON, GLASS

FINISH: ANTIQUE BRASS, MATTE SWIRL


SOCKET TYPE: E12

SOCKET QTY: 2

BULB WATTAGE: 40W or /CFL 9W or /LED 4W

VOLTAGE: 110V-120V

ITEM NET WEIGHT: 5.9LBS

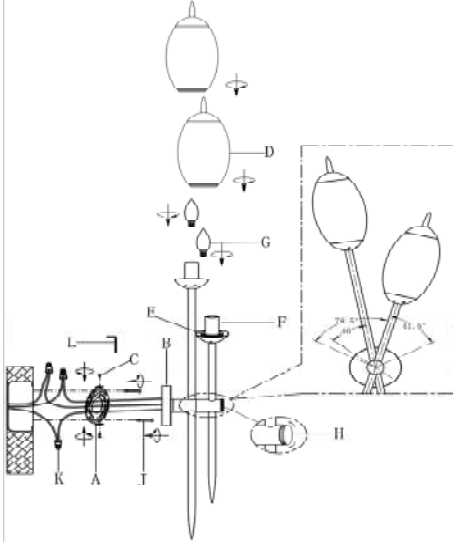

PARTS INCLUDED:

Mounting Plate (A)	Qty: 1 Pc	Socket Assembly (E)	Qty: 2 Pcs
Back Plate (B)	Qty: 1 Pc	Socket (F)	Qty: 2 Pcs
Canopy Screw (C)	Qty: 2 Pcs	Turn Knob (H)	Qty: 1 Pc
Glass Shade (D)	Qty: 2 Pcs		

HARDWARE INCLUDED:

Mounting Screws (J)	Qty: 2 Pcs
Plastic Wire Cap (K)	Qty: 3 Pcs
Allen Wrench (L)	Qty: 1 Pc

TOOLS NEEDED (Not Included):

1 Screwdriver



These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.



TO ASSEMBLE:

1. Shut off the main electrical supply from the main fuse box/circuit breaker.
2. Attach mounting plate(A) to wall or junction box using mounting screws (J).
3. Connect ground wire from wall to ground wire from lamp using the wire caps (K).
4. Attach house wire to lamp wires as shown. Fasten the pairs together with a wire caps(K) . **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
5. Attach back plate (B) to mounting plate (A) by inserting canopy screws (C) through predrilled holes. Then tighten by using allen wrench(L) .
6. Rotate the post carefully to the desired angle, then use the turn knob(H) to **fix the post** by turning in a clockwise direction until tight.
7. Insert 2 TYPE-B 40W or/CFL 9W or /LED 4W bulb (not included) into the socket (F). **DO NOT EXCEED SPECIFIED WATTAGE OF SCONCE.**
8. Put and assemble the glass shade (D) by rotating in a clockwise direction with socket assembly (E) .
9. Restore power to junction box and test fixture.
10. **NOTE: Glass has to be off in order to rotate from left to right.**
11. **NOTE: The inner pole can only be rotated approximately 40 degrees from the right to left side and the outer pole can be rotated within a range of 120 degrees from left to right**

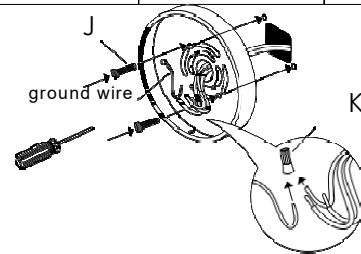

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIOS