

# ASSEMBLY INSTRUCTIONS

## ITEM DESCRIPTION:



ITEM NO: 89646 NAME: Finley Chandelier

MATERIAL TYPE: Rattan FINISH: White

SOCKET TYPE: E26 SOCKET QTY: 1

BULB WATTAGE: 60W

VOLTAGE: 110-120V ITEM NET WEIGHT: 13.5LBS

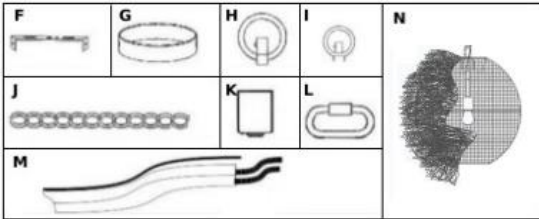

## PARTS INCLUDED:

|                    |        |
|--------------------|--------|
| (F) Mounting Plate | Qty: 1 |
| (G) Canopy         | Qty: 1 |
| (H) Canopy Loop    | Qty: 1 |
| (I) Pendant Loop   | Qty: 1 |
| (J) Chain          | Qty: 1 |
| (K) Socket         | Qty: 1 |
| (L) Quick Links    | Qty: 2 |
| (M) Fixture Wire   | Qty: 1 |
| (N) Shade          | Qty: 1 |

## HARDWARE INCLUDED:

|                |      |              |      |
|----------------|------|--------------|------|
| Mounting Screw | 2 Pc | Star Washer  | 2 Pc |
| Canopy Screw   | 2 Pc | Ground Screw | 1 Pc |
| Wire Connector | 3 Pc |              |      |

## TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation of this chandelier.

We strongly suggest that all hard-wired fixtures must



## TO ASSEMBLE:

1. Shut off the main electrical supply from the main fuse box/circuit breaker, carefully unpack all fixture parts and hardware and gently pull wiring down from ceiling junction box.
2. Remove mounting plate from the canopy by unscrewing the collar.
3. Carefully inspect the pendant's fixture wires.  
Neutral fixture wire: White  
Hot fixture wire: Black  
Ground wire: Green
4. Wrap ground wire of lamp assembly and ground wire of junction together and fasten together with a wire nut and wrap with electrical tape.
5. Attach the neutral fixture wire from the pendant to the neutral junction box wire. Fasten each together with a wire nut and wrap the connection with electrical tape.
6. Attach the hot fixture wire from the pendant to the hot junction wire. Fasten each together with a wire nut and wrap with electrical tape. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
7. Gently tuck the wire connections neatly into the ceiling junction box and place the mounting plate over the center of the ceiling junction box.
8. Align holes in mounting plate with holes in junction box and attach with two mounting bolts. Secure bolts with a Phillips head screwdriver and push canopy up over the mounting plate until it is flush with the ceiling.
9. Push collar through hole in canopy and thread onto nipple on canopy is flush with the ceiling.
10. Restore power to junction box and test fixture. Insert 60-Watt Type A bulb into fixture. DO NOT EXCEED SPECIFIED WATTAGE OF PENDANT.

## How to fluff the loops on the Finley Chandelier 89646

1. With the item hanging above ground, start to gently fold back the top tier. If needed, apply heat from a hair dryer (or similar) to make the rattan more malleable. Keep in mind to not fold the rattan too far so it breaks.
2. Keep folding and pressing back the tier all the way around the chandelier then move onto the next tier.
3. Continue the above steps until you are at the bottom or have achieved the look you want.

## CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

A R T E R I O R S