


ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:

ITEM NO.: DWC91	NAME: LONDON SCONCE
MATERIAL TYPE: IRON, GLASS, LEATHER	FINISH: ENGLISH BRONZE, CLEAR SEEDY, GRAY
SOCKET TYPE: E12	SOCKET QTY: 2
BULB WATTAGE: 40W or /CFL 9W or /LED 4W	
VOLTAGE: 110V-120V	ITEM NET WEIGHT: 6.6LBS

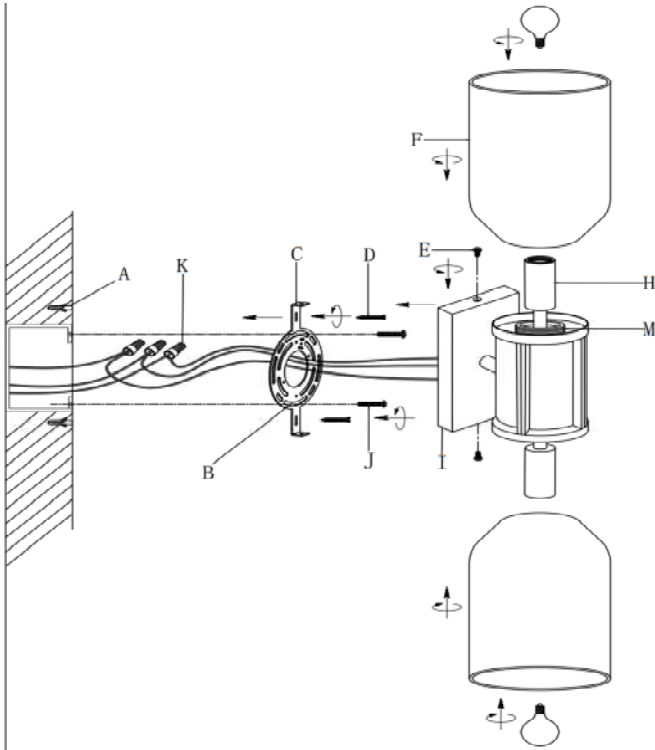

PARTS INCLUDED:

Mounting Plate (B)	Qty: 1 Pc	Glass Shade (F)	Qty: 2 Pcs
Back Plate (C)	Qty: 1 Pc	Socket (H)	Qty: 2 Pcs
Canopy Screw (E)	Qty: 2 Pcs	Lamp Base (I)	Qty: 1 Pc

HARDWARE INCLUDED:

Plastic anchor (A)	Qty: 2Pcs
Strengthen screw (D)	Qty: 2Pcs
Mounting Screws (J)	Qty: 2 Pcs
Plastic Wire Cap (K)	Qty: 3 Pcs

TOOLS NEEDED (Not Included):

1 Screwdriver



These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.



TO ASSEMBLE:

- Shut off the main electrical supply from the main fuse box/circuit breaker.
- Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly.
- Drill 2 holes in wall **to align** with 2 holes of Back Plate(C) , insert plastic anchors(A) into drilled holes. Attach mounting plate(B) to wall or junction box using mounting screws (J) .
- Connect ground wire from wall to ground wire from lamp using the wire caps (K).
- Attach house wire to lamp wires as shown. Fasten the pairs together with a wire caps(K) . **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
- Attach and fasten Back Plate(C) to wall by screwing the 2 strengthen screws(D) provided in the plastic anchors(A)
- Attach lamp base (I) to back plate (C) by inserting canopy screws (E) through predrilled holes then tighten using screwdriver.
- Put and assembly the glass shade (F) to the lamp base (I) by rotating in a clockwise direction.
- Insert 2 TYPE-G 40W or/CFL 9W or /LED 4W bulb(not included) into socket (H). DO NOT EXCEED SPECIFIED WATTAGE OF SCONCE..
- Restore power to junction box and test fixture.

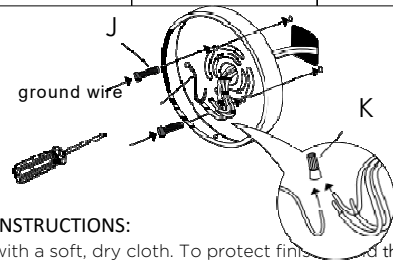

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish and the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIO RS