
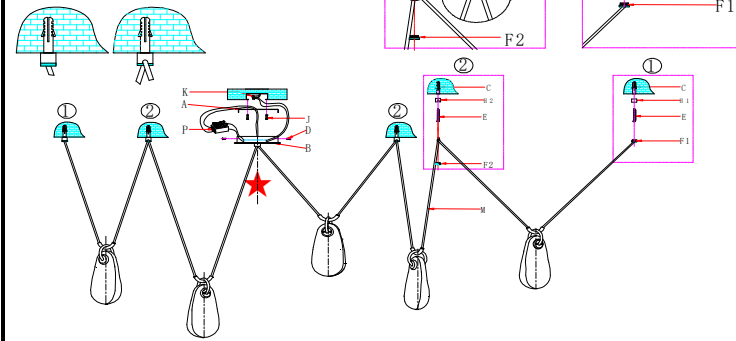
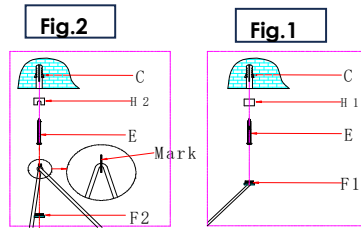


ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:

ITEM NO: GADLC02	NAME: MELT CHANDELIER
MATERIAL TYPE: IRON, GLASS	FINISH: ENGLISH BRONZE, SMOKE
SOCKET TYPE: LED	SOCKET QTY: 5
BULB WATTAGE: 18W	
VOLTAGE: 100V-120V	ITEM NET WEIGHT: 25.5LBS



PARTS INCLUDED:

Mounting Plate (A)	Qty:1PC	Fabric Cord (M)	Qty:1PC
Canopy(B)	Qty:1PC	Fast Connector (P)	Qty:1PC
Anchor (C)	Qty:5PCS		
Canopy Screw(D)	Qty:2PCS		
Strengthen Screw(E)	Qty:5PCS		
Metal Cover (F1)	Qty:2PCS		
Metal Cover (F2)	Qty:3PCS		
Notching Metal Cap (H1)	Qty:2PCS		
Notching Metal Cap (H2)	Qty:3PCS		

HARDWARE INCLUDED:

Mounting Screw (J)	Qty:2PCS
Plastic Wire Connector(K)	Qty:3PCS
Green Ground Screw	Qty:1PC

TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver
- Allen Wrench

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

For customer service questions call 1-800-338-2150



TO ASSEMBLE:

- Shut off the main electrical supply from the main fuse box/ circuit breaker.
- Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly.
- Gently pull wiring down from ceiling junction box and allow to hang.
- Remove mounting plate(A) from the canopy(B) by unscrewing the canopy screw(D).
- PLEASE PAY SPECIAL ATTENTION TO THE FACT THAT YOU DO NOT NEED TO CONNECT THE WIRE TO THE DEVICE (M). IT IS USED FOR WIRE CONNECTIONS IN THE EUROPEAN MARKET.
- Carefully inspect the chandelier's fixture wires.
Neutral fixture wire: White
Hot fixture wire: Black
Ground wire: Bare wire
- Wrap ground wire of lamp assembly and ground wire of junction box together and fasten together with a wire nut and wrap the connection with electrical tape.
- Attach the neutral fixture wire from the chandelier to the neutral junction box wire (usually white). Fasten each together with a wire nut and wrap the connection with electrical tape.
- Attach the hot fixture wire from the chandelier to the hot junction box wire (usually black). Fasten each together with a wire nut and wrap the connection with electrical tape.
DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
- Please note that this product is suitable for 0-10V dimmer switches. Connect the purple wire (+) and the gray wire (-) to the dimmer switch as shown in Fig. 3. BE SURE NO STRANDS ARE EXPOSED.
- Connect the power wires of the lamp together using the fast connector (P). Connect the black wire to the positive electrode and the white wire to the negative electrode of the fast connector (P).
- Gently tuck the wire connections(K) neatly into the ceiling junction box.
- Place the mounting plate(A) over the center of the ceiling junction box.
- Align holes in mounting plate(A) with holes in junction box and attach with two mounting screws(J). Secure screws with a Phillips head screwdriver.
- Push canopy(B) up over the mounting plate(A) until it is flush with the ceiling. Secure canopy(B) by 2 canopy screw(D) and secure screws with a Phillips head screwdriver.
- To ensure the melt glass pieces hang straight down and the cords be equidistant starting from the canopy, please assemble and fix the notching cap from inside out ②→①. Desired position spot is marked on cord with label sticker, this is where you can position the notching metal cap(H2) and H(1)on cord.
- As shown in FIG 2, mark the spots on ceiling with pencil to drill holes, insert anchors (C) into the drilled holes. Fix the notching metal cap (H2) with a strengthened screw (E) by screwing it into the anchor (C). Fix the fabric cord to the ceiling by attaching the Metal Cover (F2) to the Notching Metal Cap (H2) and then secure it by turning in clockwise direction till tight.
- As shown in FIG 1, mark the spots on ceiling with pencil to drill holes, insert anchors (C) into the drilled holes. Fix the notching metal cap (H1) with a strengthened screw (E) by screwing it into the anchor (C). Fix the fabric cord to the ceiling by attaching the Metal Cover (F1) to the Notching Metal Cap (H1) and then secure it by turning in clockwise direction till tight.
- Restore power to junction box and test fixture.

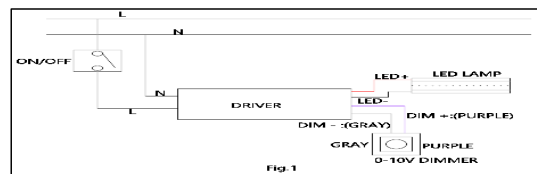


Fig.3

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

ARTERIO RS